



Tanie OGRZEWANIE




Grzejniki łazienkowe

PBM

Układ wizualny grzejnika dla poszczególnych rozmiarów:

Ciepłota robocze: 1000 kPa

Maksymalna temperatura pracy: 95°C (82°C wersja z grzałką elektryczną Terma)

Grzejnik łazienkowy PBM	Nr SAP	A ↑ [mm]	B ↔ [mm]	C2 [mm]	75/65/20°C [W]	55/45/20°C [W]	 [W]	D [mm]	E [mm]	F [mm]	 [dm³]	 [kg]
	HBD715	700	500	50	308	165	300	470	520	90	2,72	6,12
	HBD716	900	500	50	407	218	400	470	720	90	3,72	8,37
	HBD717	1220	500	50	571	306	600	470	1040	90	4,92	10,95

Wymiary:

Grzejnik PBM

Gwarancja		
8 lat		

Gwarancja: 8 lat





Grzejnik dostępny w wersji c.o.,
możliwość zastosowania grzałki elektrycznej (opcjonalnie).

Podłączenie:



Kolor: Biały (RAL 9016)

Ciśnienie robocze: 1000 kPa

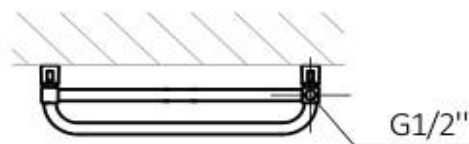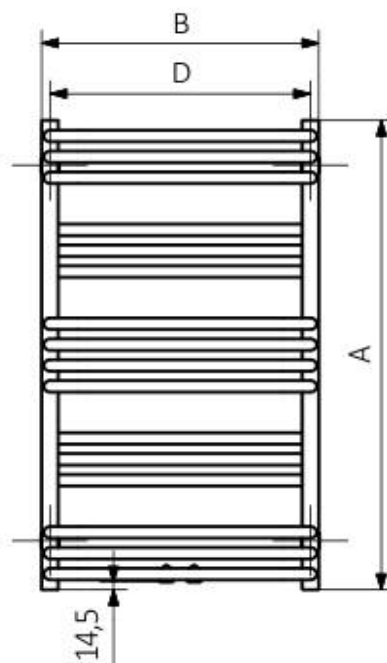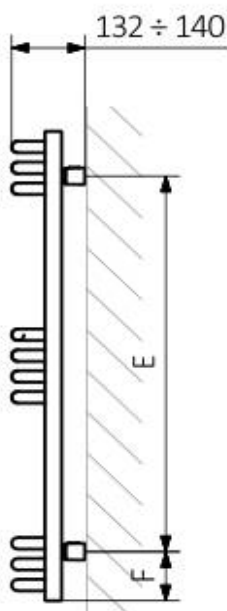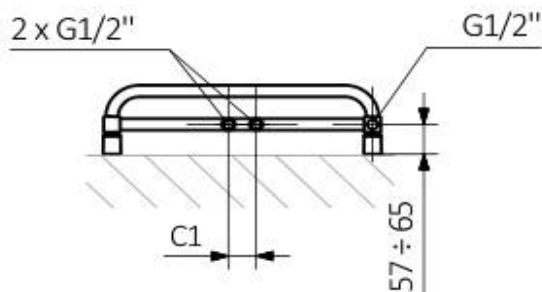

Kolektor / Rurka:



- A – wysokość
- B – szerokość
- C1-C5 – rozstaw połączeń
- D – rozstaw mocowań w poziomie
- E – rozstaw mocowań w pionie
- F – odległość od osi dolnego mocowania do dolnej krawędzi kolektora